
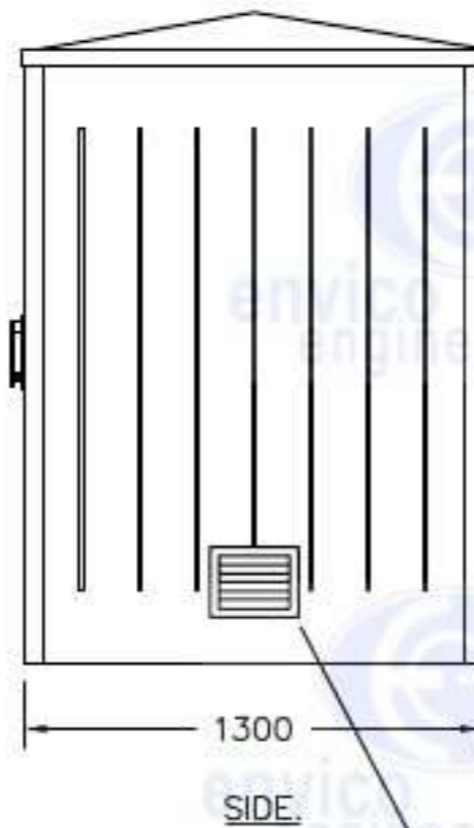


BACK INSPECTION FLAP  
SUSPENDED ON BRASS  
HINGE & SECURED  
BY STAINLESS STEEL HASP & STAPLE FOR  
PADLOCKING. FOR 10mm HASPS.


ROOF HINGED AT  
BACK WITH ALLOY  
HINGES, & SECURED INSIDE  
FRONT BY SHOOT BOLTS. &  
BY INTERNAL FIXING STAY WHEN RAISED.

DOORS SUSPENDED  
ON BRASS BUTT  
HINGES.

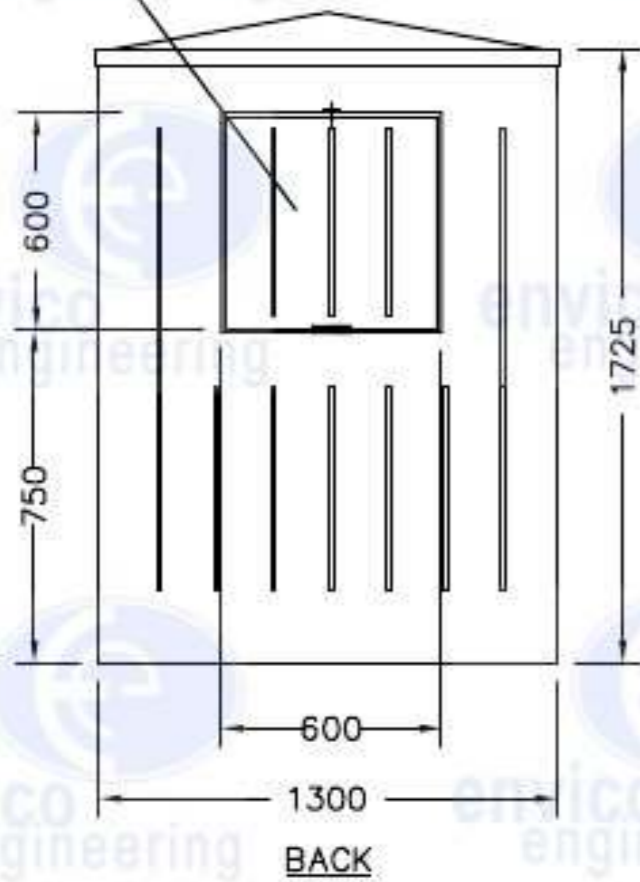

250 x 200 VENTS  
ONE IN EACH SIDE


STAINLESS STEEL  
ESPAGNOLETTE  
HANDLE FOR  
PADLOCK

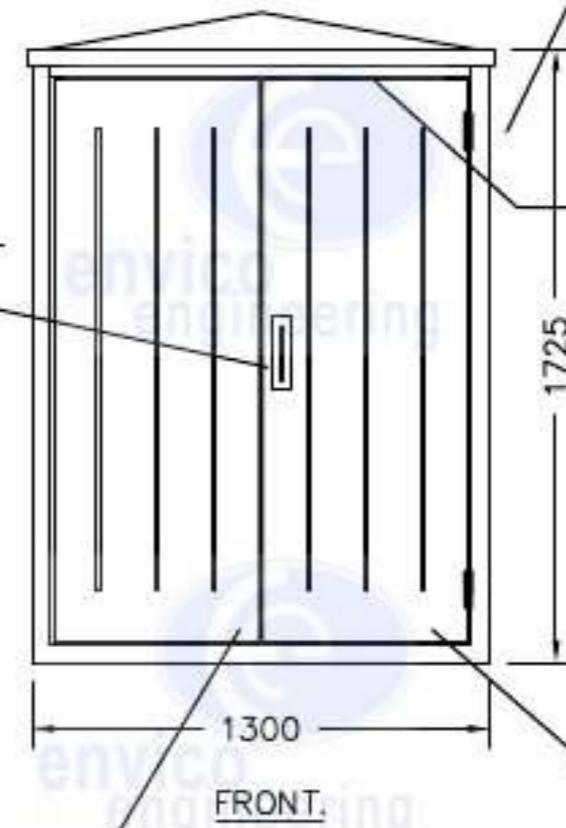

DOOR SHORTENED BY 12mm  
TO PRODUCE A VENTILATION  
GAP UNDER ROOF.

SHOOT BOLT AT LOW  
LEVEL ON RETAINED  
LEAF.

LOW LEVEL DOOR  
STAYS TO BOTH  
DOORS

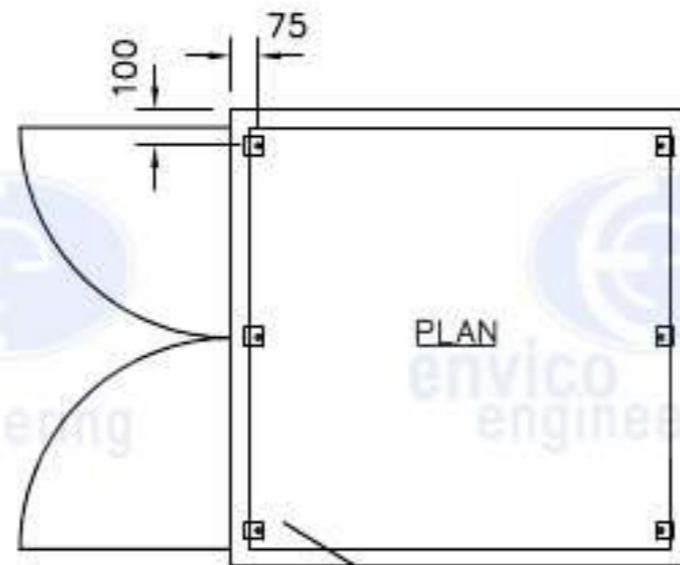

6 OFF GROUND FIXING  
BRACKETS. STAINLESS STEEL,  
DRILLED FOR 12 M BOLTS.